



Current Coverage – South Visalia area. Light purple: Areas in need of improvement by off-loading surrounding sites.

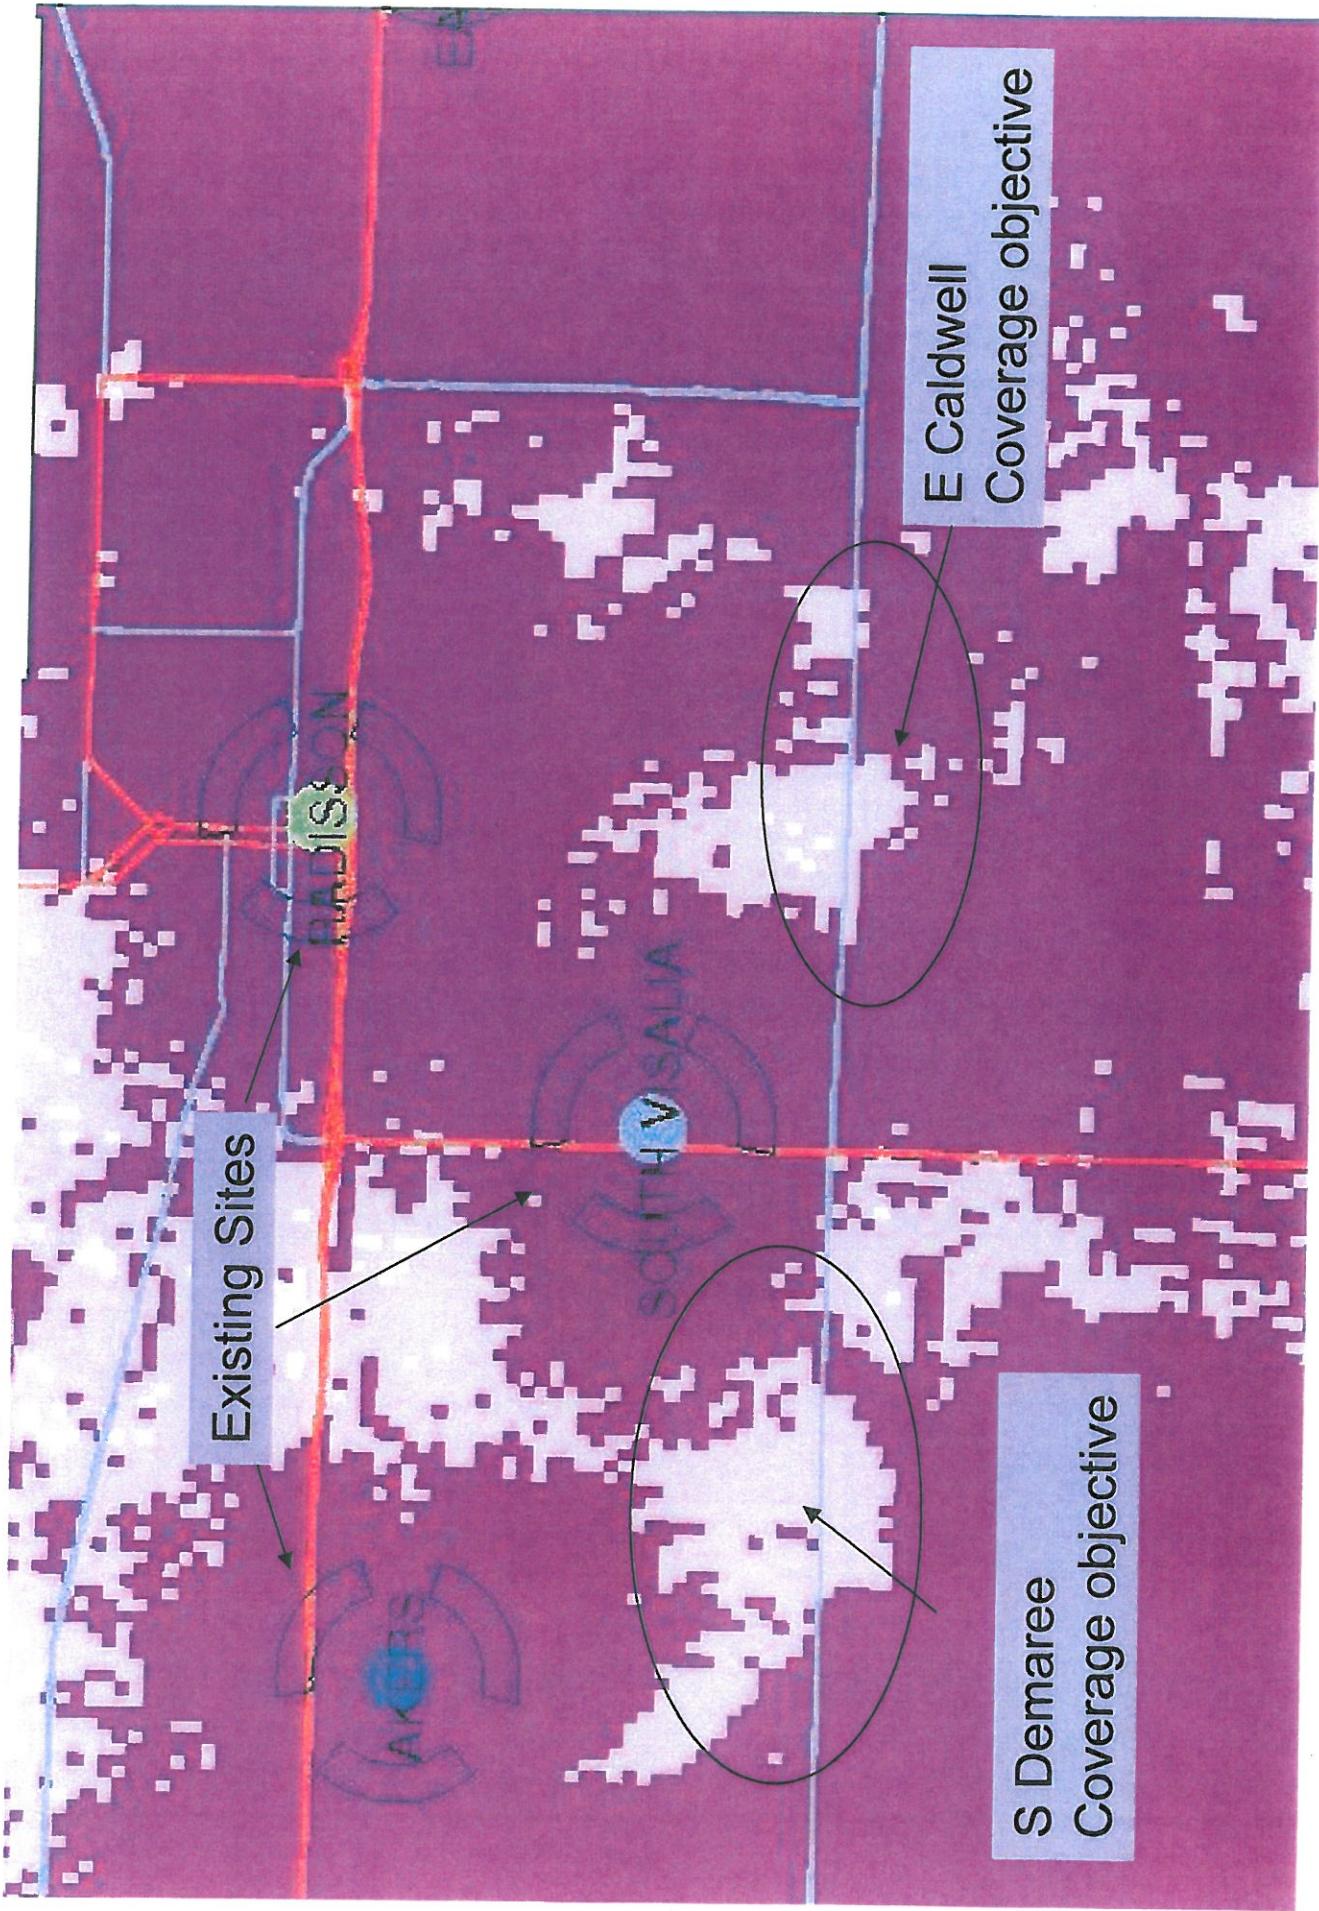

Proposed Coverage – South Visalia area. Areas improved and will meet objective  
of off-loading surrounding sites.

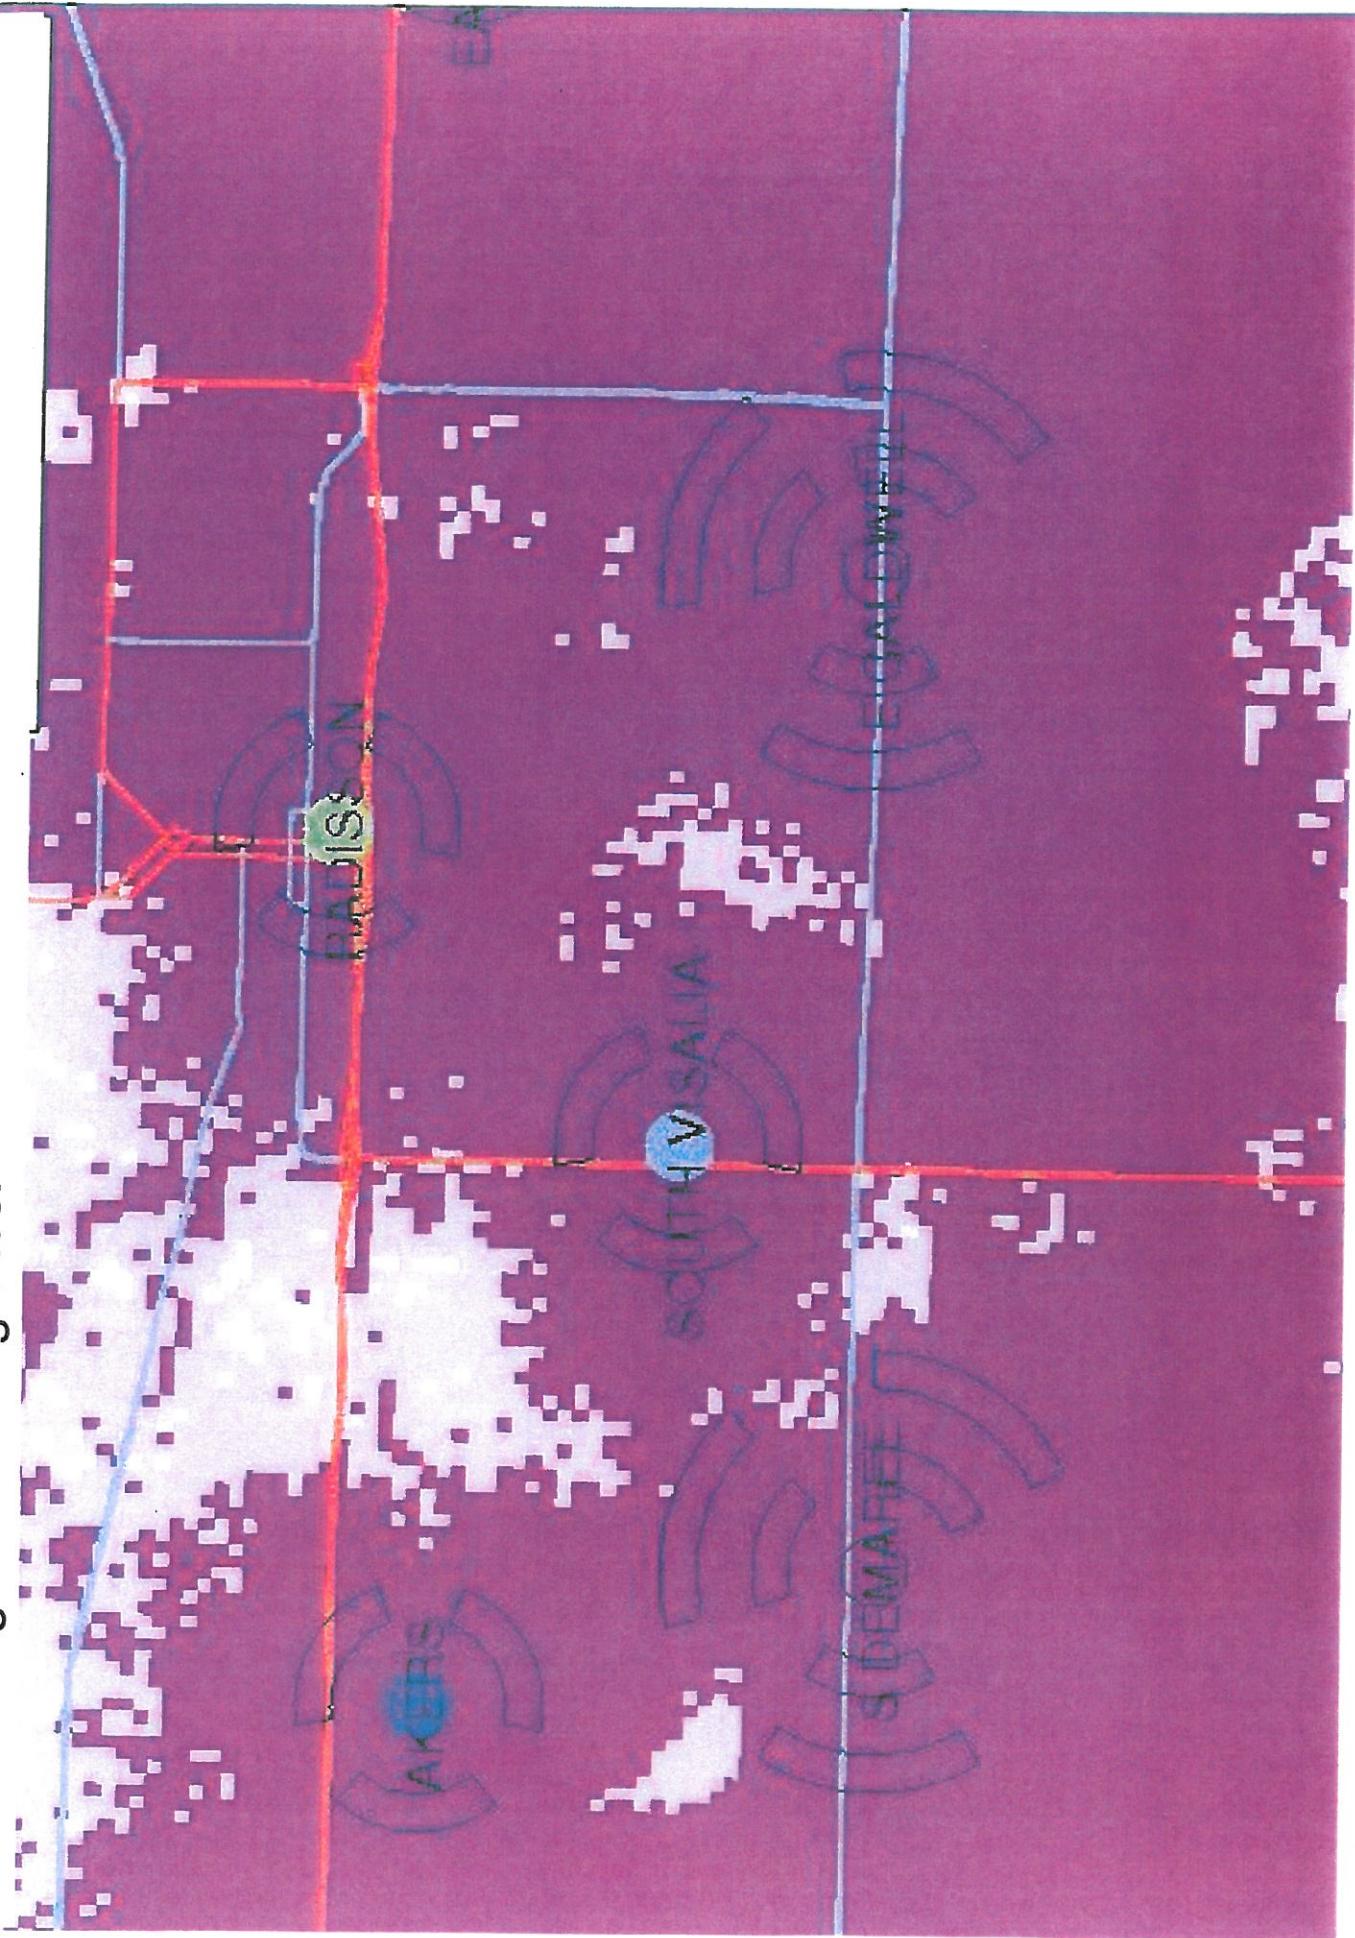

**Verizon Wireless • Proposed Base Station (Site No. 193513 "E. Caldwell")  
1748 East Caldwell Avenue • Visalia, California**

**Statement of Hammett & Edison, Inc., Consulting Engineers**

The firm of Hammett & Edison, Inc., Consulting Engineers, has been retained on behalf of Verizon Wireless, a personal wireless telecommunications carrier, to evaluate the base station (Site No. 193513 "E. Caldwell") proposed to be located at 1748 East Caldwell Avenue in Visalia, California, for compliance with appropriate guidelines limiting human exposure to radio frequency ("RF") electromagnetic fields.

**Executive Summary**

Verizon proposes to install directional panel antennas on a new 80-foot pole to be located at 1748 East Caldwell Avenue in Visalia. The proposed operation will comply with the FCC guidelines limiting public exposure to RF energy.

**Prevailing Exposure Standards**

The U.S. Congress requires that the Federal Communications Commission ("FCC") evaluate its actions for possible significant impact on the environment. A summary of the FCC's exposure limits is shown in Figure 1. These limits apply for continuous exposures and are intended to provide a prudent margin of safety for all persons, regardless of age, gender, size, or health. The most restrictive FCC limit for exposures of unlimited duration to radio frequency energy for several personal wireless services are as follows:

Wireless Service	Frequency Band	Occupational Limit	Public Limit
Microwave (Point-to-Point)	5–80,000 MHz	5.00 mW/cm <sup>2</sup>	1.00 mW/cm <sup>2</sup>
BRS (Broadband Radio)	2,600	5.00	1.00
AWS (Advanced Wireless)	2,100	5.00	1.00
PCS (Personal Communication)	1,950	5.00	1.00
Cellular	870	2.90	0.58
SMR (Specialized Mobile Radio)	855	2.85	0.57
700 MHz	700	2.35	0.47
[most restrictive frequency range]	30–300	1.00	0.20

**General Facility Requirements**

Base stations typically consist of two distinct parts: the electronic transceivers (also called "radios" or "channels") that are connected to the traditional wired telephone lines, and the passive antennas that send the wireless signals created by the radios out to be received by individual subscriber units. The transceivers are often located at ground level and are connected to the antennas by coaxial cables. A small antenna for reception of GPS signals is also required, mounted with a clear view of the sky. Because of the short wavelength of the frequencies assigned by the FCC for wireless services, the

**Verizon Wireless • Proposed Base Station (Site No. 193513 "E. Caldwell")**  
**1748 East Caldwell Avenue • Visalia, California**

antennas require line-of-sight paths for their signals to propagate well and so are installed at some height above ground. The antennas are designed to concentrate their energy toward the horizon, with very little energy wasted toward the sky or the ground. Along with the low power of such facilities, this means that it is generally not possible for exposure conditions to approach the maximum permissible exposure limits without being physically very near the antennas.

**Computer Modeling Method**

The FCC provides direction for determining compliance in its Office of Engineering and Technology Bulletin No. 65, "Evaluating Compliance with FCC-Specified Guidelines for Human Exposure to Radio Frequency Radiation," dated August 1997. Figure 2 attached describes the calculation methodologies, reflecting the facts that a directional antenna's radiation pattern is not fully formed at locations very close by (the "near-field" effect) and that at greater distances the power level from an energy source decreases with the square of the distance from it (the "inverse square law"). The conservative nature of this method for evaluating exposure conditions has been verified by numerous field tests.

**Site and Facility Description**

Based upon information provided by Verizon, including zoning drawings by Smithco Surveying Engineering, dated May 27, 2010, it is proposed to install twelve Antel directional antennas – six Model WPA-80063-8CF-3 cellular antennas, three Model BXA-70063-8CF-6 700 MHz antennas, and three Model BXA-185063-16CF-2 PCS antennas – on a new 80-foot pole to be sited within the industrial yard located at 1748 East Caldwell Avenue in Visalia. The antennas would be mounted with up to 6° downtilt at an effective height of about 76 feet above ground and would be oriented in groups of four toward 20°T, 110°T, and 220°T. The maximum effective radiated power in any direction would be 4,480 watts, representing the simultaneous operation of seven cellular channels at 640 watts each. No transmissions are proposed from the 700 MHz and PCS antennas. There are reported no other wireless telecommunications base stations nearby.

**Study Results**

For a person anywhere at ground, the maximum ambient RF exposure level due to the proposed Verizon operation is calculated to be 0.0023 mW/cm<sup>2</sup>, which is 0.40% of the applicable public exposure limit. The maximum calculated level at the second-floor elevation of any nearby building\* is 0.54% of the public exposure limit. It should be noted that these results include several "worst-case" assumptions and therefore are expected to overstate actual power density levels from the proposed operation.

---

\* Located at least 130 feet away, based on the drawings.

**Verizon Wireless • Proposed Base Station (Site No. 193513 "E. Caldwell")  
1748 East Caldwell Avenue • Visalia, California**

**No Recommended Mitigation Measures**

Due to their mounting locations, the Verizon antennas would not be accessible to the general public, and so no mitigation measures are necessary to comply with the FCC public exposure guidelines. It is presumed that Verizon will, as an FCC licensee, take adequate steps to ensure that its employees or contractors comply with FCC occupational exposure guidelines whenever work is required near the antennas themselves.

**Conclusion**

Based on the information and analysis above, it is the undersigned's professional opinion that operation of the base station proposed by Verizon Wireless at 1748 East Caldwell Avenue in Visalia, California, will comply with the prevailing standards for limiting public exposure to radio frequency energy and, therefore, will not for this reason cause a significant impact on the environment. The highest calculated level in publicly accessible areas is much less than the prevailing standards allow for exposures of unlimited duration. This finding is consistent with measurements of actual exposure conditions taken at other operating base stations.

**Authorship**

The undersigned author of this statement is a qualified Professional Engineer, holding California Registration No. E-18063, which expires on June 30, 2011. This work has been carried out under his direction, and all statements are true and correct of his own knowledge except, where noted, when data has been supplied by others, which data he believes to be correct.

October 8, 2010




*Rajat Mathur*  
Rajat Mathur, P.E.  
(707) 996-5200

## FCC Radio Frequency Protection Guide

The U.S. Congress required (1996 Telecom Act) the Federal Communications Commission ("FCC") to adopt a nationwide human exposure standard to ensure that its licensees do not, cumulatively, have a significant impact on the environment. The FCC adopted the limits from Report No. 86, "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," published in 1986 by the Congressionally chartered National Council on Radiation Protection and Measurements ("NCRP"). Separate limits apply for occupational and public exposure conditions, with the latter limits generally five times more restrictive. The more recent standard, developed by the Institute of Electrical and Electronics Engineers and approved as American National Standard ANSI/IEEE C95.1-2006, "Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," includes similar limits. These limits apply for continuous exposures from all sources and are intended to provide a prudent margin of safety for all persons, regardless of age, gender, size, or health.

As shown in the table and chart below, separate limits apply for occupational and public exposure conditions, with the latter limits (in *italics* and/or dashed) up to five times more restrictive:

Frequency	Electromagnetic Fields (f is frequency of emission in MHz)					
	Applicable Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Equivalent Far-Field Power Density (mW/cm <sup>2</sup> )		
0.3 – 1.34	614	<i>614</i>	1.63	<i>1.63</i>	100	<i>100</i>
1.34 – 3.0	614	<i>823.8/f</i>	1.63	<i>2.19/f</i>	100	<i>180/f<sup>2</sup></i>
3.0 – 30	1842/f	<i>823.8/f</i>	4.89/f	<i>2.19/f</i>	900/f <sup>2</sup>	<i>180/f<sup>2</sup></i>
30 – 300	61.4	27.5	0.163	0.0729	1.0	0.2
300 – 1,500	<i>3.54√f</i>	<i>1.59√f</i>	<i>√f/106</i>	<i>√f/238</i>	<i>f/300</i>	<i>f/1500</i>
1,500 – 100,000	137	61.4	0.364	0.163	5.0	1.0

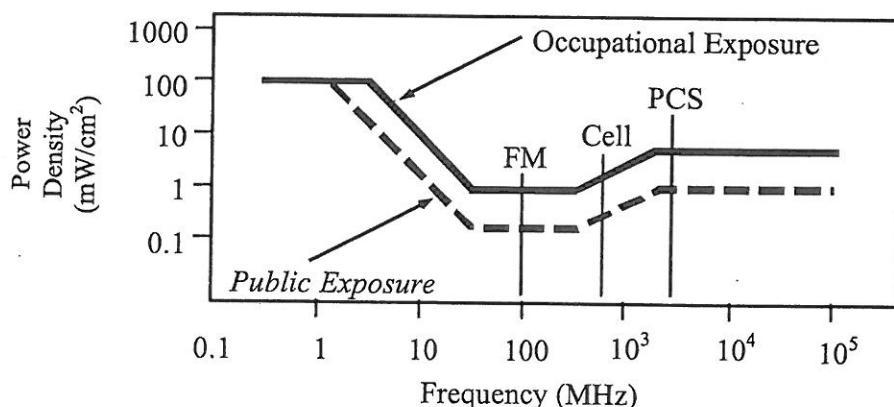

Higher levels are allowed for short periods of time, such that total exposure levels averaged over six or thirty minutes, for occupational or public settings, respectively, do not exceed the limits, and higher levels also are allowed for exposures to small areas, such that the spatially averaged levels do not exceed the limits. However, neither of these allowances is incorporated in the conservative calculation formulas in the FCC Office of Engineering and Technology Bulletin No. 65 (August 1997) for projecting field levels. Hammett & Edison has built those formulas into a proprietary program that calculates, at each location on an arbitrary rectangular grid, the total expected power density from any number of individual radio sources. The program allows for the description of buildings and uneven terrain, if required to obtain more accurate projections.



HAMMETT & EDISON, INC.  
CONSULTING ENGINEERS  
SAN FRANCISCO

FCC Guidelines  
Figure 1

## RFR.CALC™ Calculation Methodology

### Assessment by Calculation of Compliance with FCC Exposure Guidelines

The U.S. Congress required (1996 Telecom Act) the Federal Communications Commission ("FCC") to adopt a nationwide human exposure standard to ensure that its licensees do not, cumulatively, have a significant impact on the environment. The maximum permissible exposure limits adopted by the FCC (see Figure 1) apply for continuous exposures from all sources and are intended to provide a prudent margin of safety for all persons, regardless of age, gender, size, or health. Higher levels are allowed for short periods of time, such that total exposure levels averaged over six or thirty minutes, for occupational or public settings, respectively, do not exceed the limits.

#### Near Field.

Prediction methods have been developed for the near field zone of panel (directional) and whip (omnidirectional) antennas, typical at wireless telecommunications base stations, as well as dish (aperture) antennas, typically used for microwave links. The antenna patterns are not fully formed in the near field at these antennas, and the FCC Office of Engineering and Technology Bulletin No. 65 (August 1997) gives suitable formulas for calculating power density within such zones.

$$\text{For a panel or whip antenna, power density } S = \frac{180}{\theta_{\text{BW}}} \times \frac{0.1 \times P_{\text{net}}}{\pi \times D \times h}, \text{ in mW/cm}^2,$$

$$\text{and for an aperture antenna, maximum power density } S_{\text{max}} = \frac{0.1 \times 16 \times \eta \times P_{\text{net}}}{\pi \times h^2}, \text{ in mW/cm}^2,$$

where  $\theta_{\text{BW}}$  = half-power beamwidth of the antenna, in degrees, and

$P_{\text{net}}$  = net power input to the antenna, in watts,

$D$  = distance from antenna, in meters,

$h$  = aperture height of the antenna, in meters, and

$\eta$  = aperture efficiency (unitless, typically 0.5-0.8).

The factor of 0.1 in the numerators converts to the desired units of power density.

#### Far Field.

OET-65 gives this formula for calculating power density in the far field of an individual RF source:

$$\text{power density } S = \frac{2.56 \times 1.64 \times 100 \times RFF^2 \times ERP}{4 \times \pi \times D^2}, \text{ in mW/cm}^2,$$

where  $ERP$  = total  $ERP$  (all polarizations), in kilowatts,

$RFF$  = relative field factor at the direction to the actual point of calculation, and



$D$  = distance from the center of radiation to the point of calculation, in meters.

The factor of 2.56 accounts for the increase in power density due to ground reflection, assuming a reflection coefficient of 1.6 ( $1.6 \times 1.6 = 2.56$ ). The factor of 1.64 is the gain of a half-wave dipole relative to an isotropic radiator. The factor of 100 in the numerator converts to the desired units of power density. This formula has been built into a proprietary program that calculates, at each location on an arbitrary rectangular grid, the total expected power density from any number of individual radiation sources. The program also allows for the description of uneven terrain in the vicinity, to obtain more accurate projections.



# ALTERNATIVE SITES MAP





SITE NAME:  
CALDWELL  
CALDWELL  
SALIA, CA  
SITE NUMBER:  
193513


**verizon wireless**

### **PROJECT DESCRIPTION**

1

הנתקים

DRIVING DIRECTIONS

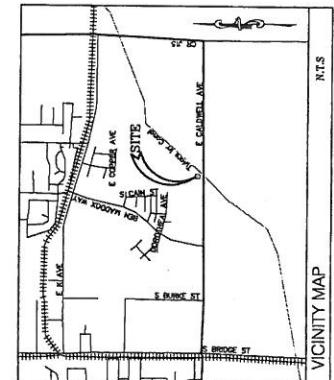

PROJECT SUMMARY

PROJECT TEAM

SAC WIRELESS SIGNATURE BLOCK

SHEET INDEX

T-1

三

11

SHEET 11

6  
U

65

四

1

五

1

4

1

10





## ISSUE STATUS

SEQ	DATE	DISPENTER	BT
0	1/10/07	W.F.E.	BT
1	1/10/07	RE: ZONING	BT
2	1/10/07	RE: REQUESTS	BT
3	1/10/07	RE: ZONING	BT
4	1/10/07	RE: REQUESTS	BT
5	1/10/07	RE: SITE LAYOUT	BT
6	1/10/07	RE: SITE LAYOUT	BT

SIC

W.F.E. & A.D.  
1000 MONTEREY VALLEY DR., SUITE 200  
SAN JOSE, CALIFORNIA 95131  
FAX: 408/265-0800

PROPRIETARY INFORMATION

© 2007 VERIZON WIRELESS,  
A Division of Verizon  
All rights reserved.  
Verizon Wireless  
and its logo are trademarks  
of Verizon Intellectual Property  
and/or its respective owners.


VERIZON wireless

WALNUT CREEK, CA 94598  
2785 MITCHELL DRIVE, BLDG 9193513  
E. CALDWELL1748 E CALDWELL AVE  
VISALIA, CA  
TULARE COUNTYSHEET TITLE:  
ENLARGED  
SITE PLAN

A-2

1

ENLARGED SITE PLAN

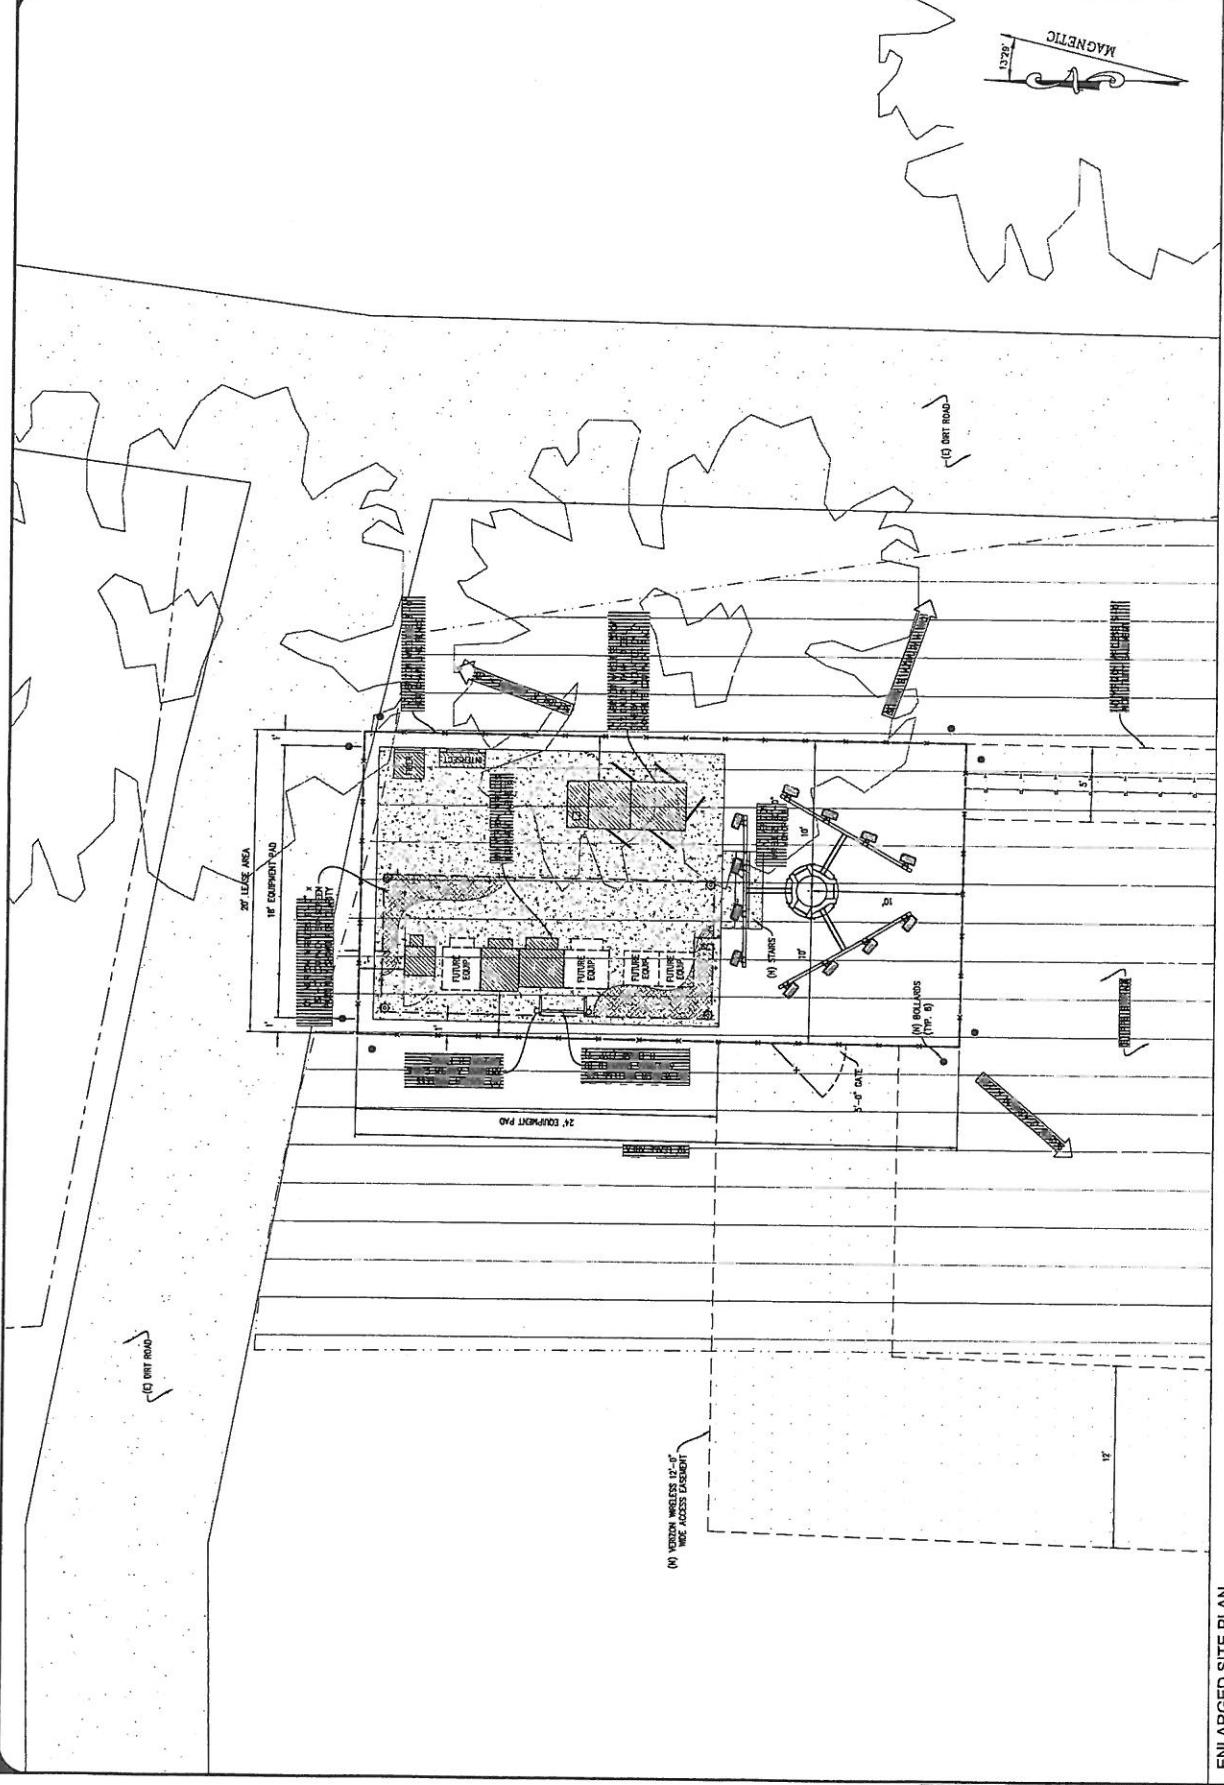

ISSUE STATUS		DATE	DESCRIPTION	BY
1	REV.	0 1/16/08	PRELIMINARY	DL
1	REV.	1 12/01/08	REV. ZONING	DA
1	REV.	1 01/15/09	REV. DOCUMENTS	DA
1	REV.	1 01/16/09	REV. ZONING	DA
1	REV.	1 01/16/09	RELOCATE SITE	DA
1	REV.	1 01/16/09	REVISE SITE LAYOUT	DA
1	REV.	1 02/27/10	REVISE SITE LAYOUT	DA




VERIZON wireless  
2785 MITCHEL DRVE., BLDG 9  
WALNUT CREEK, CA 94598

193513  
E CALDWELL

**ELEVATION  
VIEWS**

三  
四

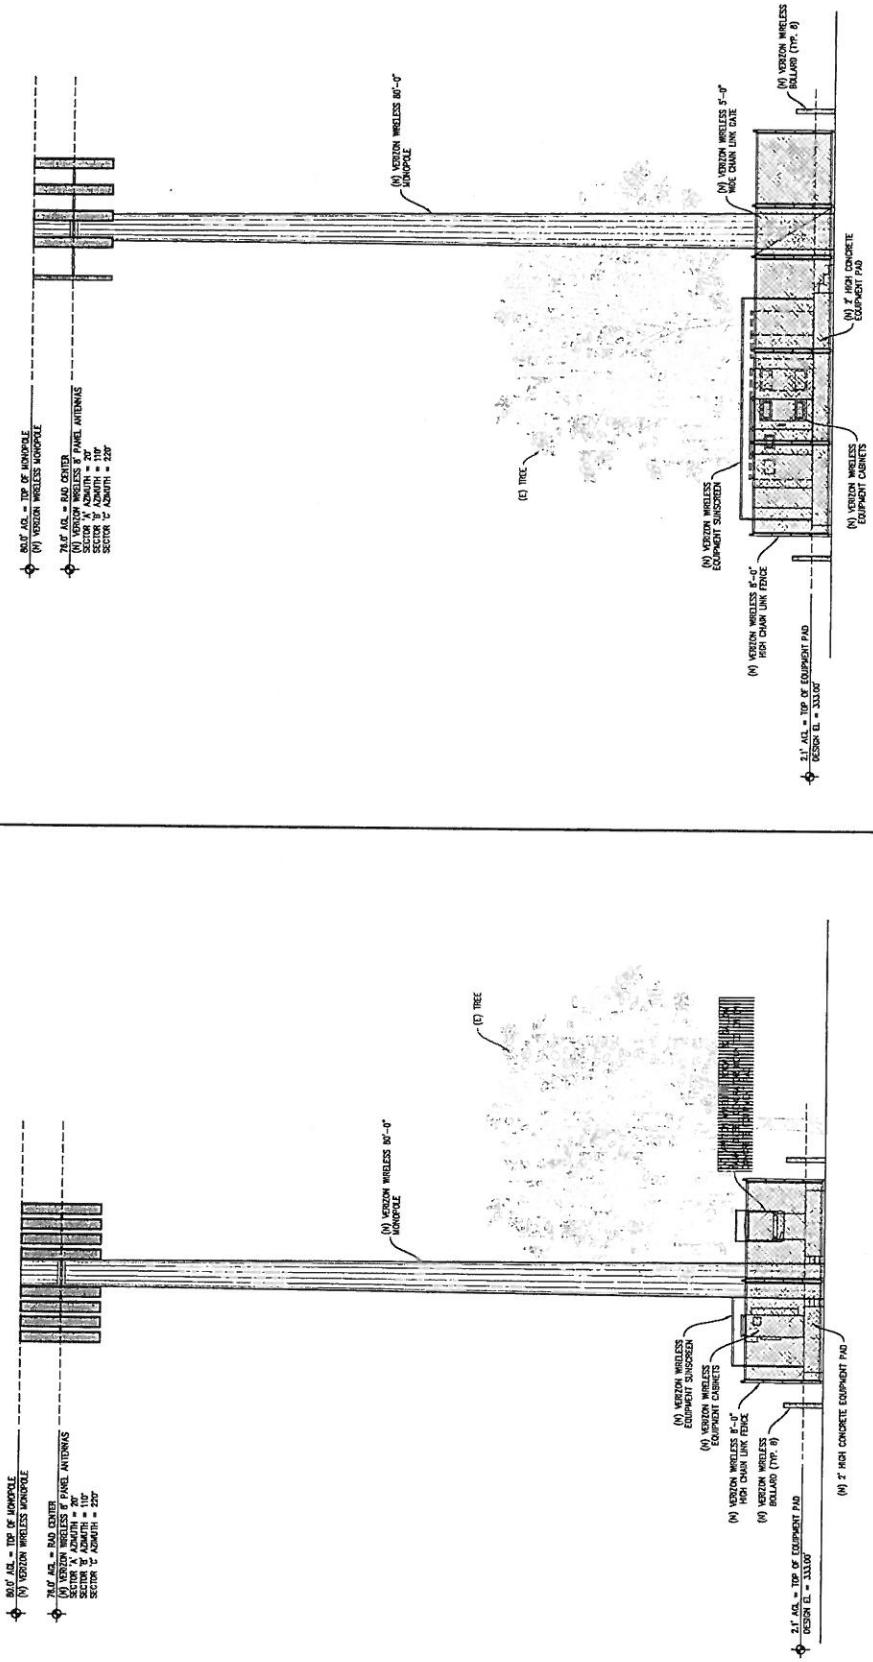

**SOUTH ELEVATION VIEW**

ISSUE STATUS		DESCRIPTION	BY
REV.	DATE		
0	11/20/09	PRELIMINARY	GL
1	11/20/09	PER ZHANG	DA
2	12/07/09	REV. BASED ON IT	DA
3	01/15/10	REV. ZHANG	DA
4	03/19/10	REVERSE SITE LAYOUT	DA
5	05/19/10	REVISE SITE LAYOUT	DA
6	05/27/10	REVISE SITE LAYOUT	DA



WALNUT CREEK, CA 94598

**Verizon wireless**

PROPRIETARY INFORMATION  
THE INFORMATION CONTAINED IN THIS SET  
FREQUENTLY IS PROPRIETARY & CONFIDENTIAL.


193513  
E CAI DWEI I

1748 E CALDWELL AVE  
VISALIA, CA  
TULARE COUNTY

ELEVATION  
SHEET TITLE  
VIEWS

4

1

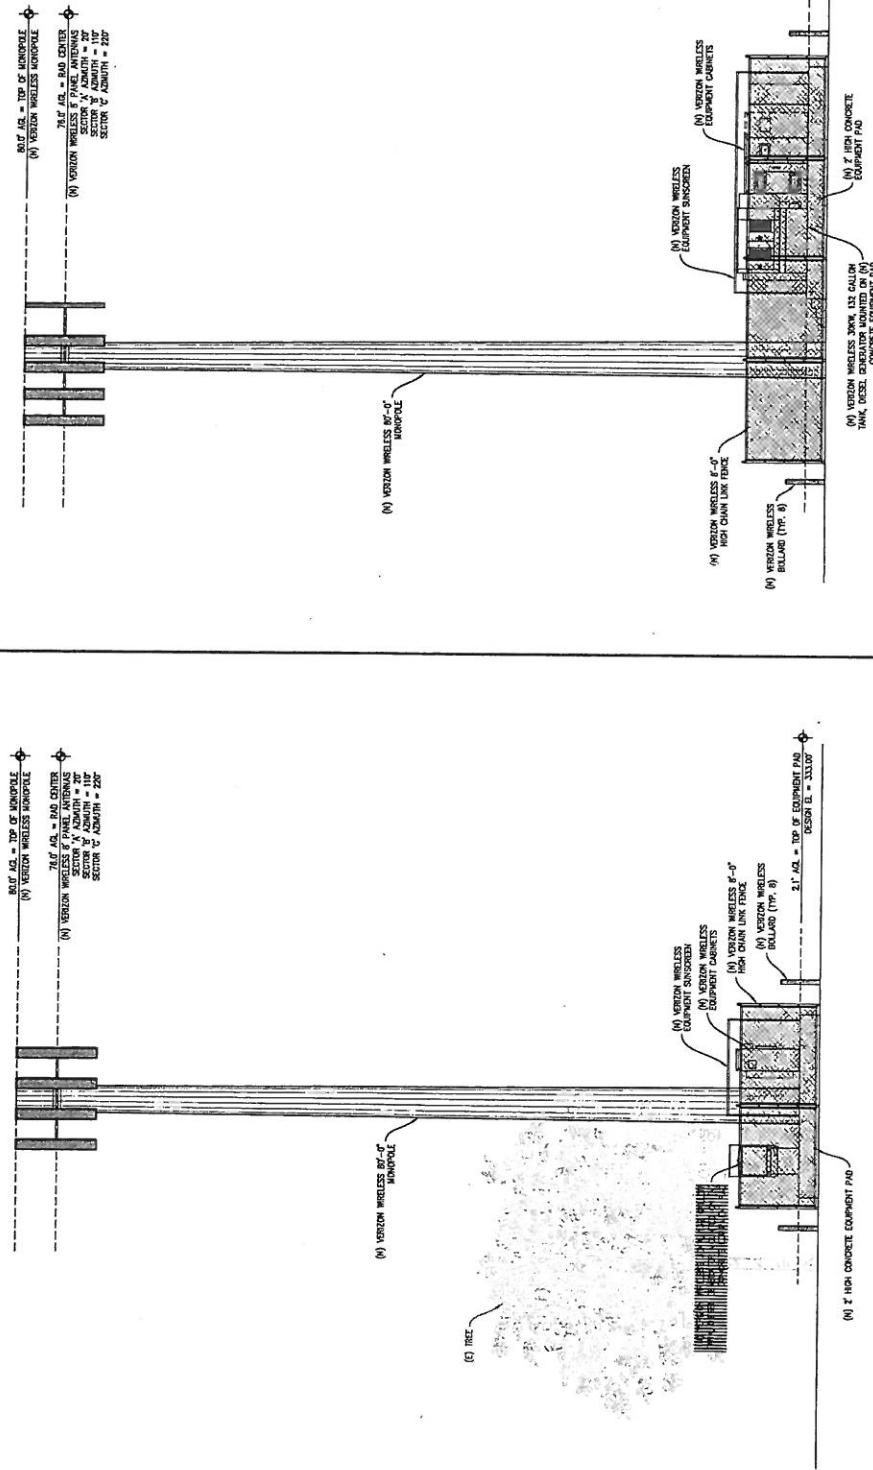

**NORTH ELEVATION VIEW**

FACT FANTASY

102

111